




Multi-WFP

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

One-part flange connector 90° elbow for cable buncher ROHRflex-MULTI

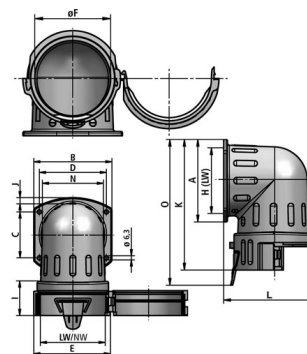

Temperature:	-40°C ... +120°C
Material:	PA plastics
IP class [acc. to EN 60529]:	IP 54 IP 69K

APPLICATIONS:
 - Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

CHARACTERISTICS:

- Properties: resistant against several oils and benzines
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- self-extinguishing
- flame resistant
- for higher protective system IP 65, IP 68, IP 69K special sealings are available



FLEXA No.	Colour	NW [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	H [mm]	K [mm]	Ø F [mm]	Weight kg/pce	PU [pcs.]
15032207070	Black	70,0	94,0	94,0	60,5	80,5	96,4	69,0	153,0	68,0	17,100	1
15032207095	Black	95,0	133,5	120,0	74,0	108,0	123,0	95	191,0	95,0	37,000	1
15032007070	Grey	70,0	94,0	94,0	60,5	80,5	96,4	69,0	153,0	68,0	17,100	1
15032007095	Grey	95,0	120,0	133,5	74,0	108,0	123,0	95	191,0	95,0	37,000	1

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.