




RQB45-M | metric thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, bend 45°, metric outer thread, integrated snap-in sleeve with sealing, high density




Temperature:	-40°C ... +120°C
Material:	PA plastics
IP class [acc. to EN 60529]:	IP 68 IP 69K

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen

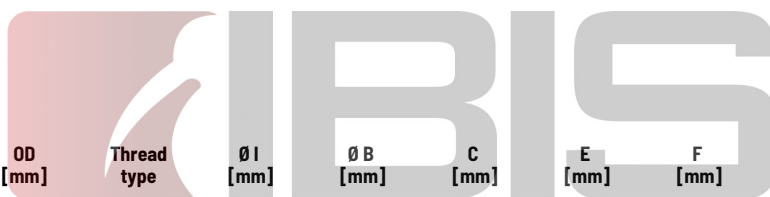

FLEXA No.	Colour	OD [mm]	Thread type	Ø I [mm]	Ø B [mm]	C [mm]	E [mm]	F [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15100010212	Black	10,0	M12 x 1,5	6,5	18,0	10,0	39,0	45,0	18	0,600	50
15100013216	Black	13,0	M16 x 1,5	8,5	22,0	12,0	42,5	48,0	21	0,900	50
15100015220	Black	15,8	M20 x 1,5	10,0	25,5	12,0	44,5	52,5	24	1,300	50
15100021220	Black	21,2	M20 x 1,5	13,0	29,5	12,0	55,0	60,0	26	1,800	50
15100021225	Black	21,2	M25 x 1,5	14,5	29,5	13,0	56,0	60,0	26	2,000	50
15100028225	Black	28,5	M25 x 1,5	17,0	37,0	13,0	64,0	72,0	32	2,700	25
15100028232	Black	28,5	M32 x 1,5	20,0	38,0	14,0	64,0	75,0	36	3,800	25
15100034232	Black	34,5	M32 x 1,5	23,0	44,0	14,0	73,5	76,0	39	3,800	10
15100034240	Black	34,5	M40 x 1,5	29,0	47,0	14,0	73,5	77,0	45	4,100	10
15100042240	Black	42,5	M40 x 1,5	31,5	56,5	17,0	82,5	86,0	48	5,500	10
15100042250	Black	42,5	M50 x 1,5	36,0	61,5	17,0	82,5	86,0	58	6,500	10
15100054250	Black	54,5	M50 x 1,5	35,5	64,0	17,0	92,0	95,0	58	9,500	5
15100054263	Black	54,5	M63 x 1,5	45,5	71,5	17,0	97,0	100,0	69	9,500	5
15100015020	Grey	15,8	M20 x 1,5	10,0	25,5	12,0	44,5	52,5	24	1,300	50
15100021020	Grey	21,2	M20 x 1,5	13,0	29,5	12,0	55,0	60,0	26	1,800	50
15100021025	Grey	21,2	M25 x 1,5	14,5	29,5	13,0	56,0	60,0	26	2,000	50
15100028032	Grey	28,5	M32 x 1,5	20,0	38,0	14,0	64,0	75,0	36	2,800	25
15100034040	Grey	34,5	M40 x 1,5	29,0	47,0	14,0	73,5	77,0	45	4,100	10
15100042050	Grey	42,5	M50 x 1,5	36,0	61,5	17,0	82,5	86,0	58	6,500	10
15100054063	Grey	54,5	M63 x 1,5	45,5	71,5	17,0	97,0	100,0	69	8,500	5

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.