


RQB45-N | NPT thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, bend 45°, NPT outer thread, integrated snap-in sleeve with sealing, high density



Temperature: -40°C ... +120°C

Material: PA plastics


IP class [acc. to EN 60529]: IP 68 | IP 69K

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

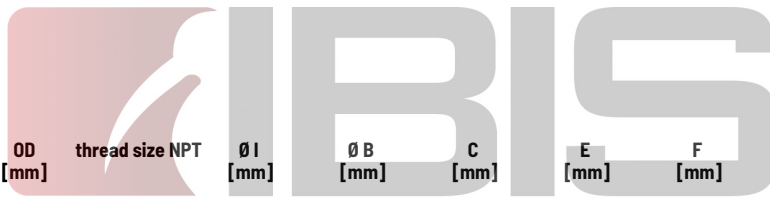

FLEXA No.	Colour	OD [mm]	thread size NPT	Ø I [mm]	Ø B [mm]	C [mm]	E [mm]	F [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15020017205	Black	15,8	1/2 inch	10,0	23,0	12,0	41,0	48,0	23	1,200	50
15020017206	Black	21,2	1/2 inch	13,0	29,5	12,0	52,0	55,0	26	1,700	50
15020017214	Black	28,5	3/4 inch	17,0	37,0	13,0	68,0	68,0	31	2,600	25
15020017216	Black	34,5	1 inch	23,0	44,0	14,0	68,0	73,5	39	3,800	10
15020017215	Black	34,5	1 1/4 inch	29,0	44,0	14,0	73,0	73,5	45	4,500	10
15020017208	Black	42,5	1 1/2 inch	30,0	52,0	17,0	82,0	81,0	58	6,300	10
15020017217	Black	52,0	1 1/4 inch	30,5	52,0	17,0	76,0	80,0	47	9,300	10
15020017209	Black	54,5	1 1/2 inch	35,0	64,0	17,0	89,0	94,5	58	8,700	5
15020017210	Black	64,0	2 inch	45,0	64,0	17,0	95,5	95,0	69	9,000	5

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.