


RQB90-M | metric thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, bend 90°, metric outer thread, integrated snap-in sleeve with sealing, high density

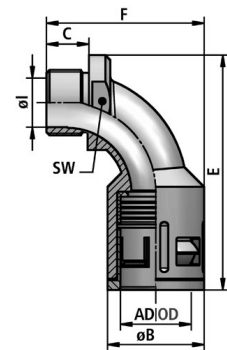

Temperature: -40°C ... +120°C

Material: PA plastics


IP class [acc. to EN 60529]: IP 68 | IP 69K

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

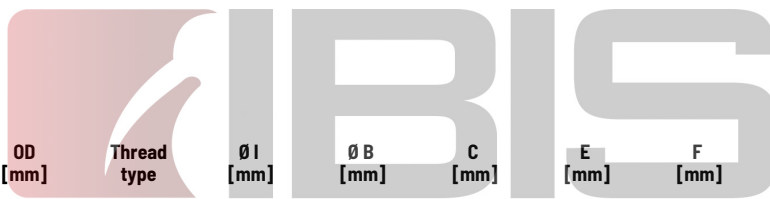

FLEXA No.	Colour	OD [mm]	Thread type	Ø I [mm]	Ø B [mm]	C [mm]	E [mm]	F [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15103010212	Black	10,0	M12 x 1,5	6,5	17,0	10,0	57,0	39,0	18	0,800	50
15103013216	Black	13,0	M16 x 1,5	8,5	20,0	12,0	59,0	40,5	21	1,000	50
15103015220	Black	15,8	M20 x 1,5	10,0	23,0	12,0	62,0	45,0	24	1,500	50
15103021220	Black	21,2	M20 x 1,5	13,0	29,5	12,0	73,0	48,0	26	2,000	50
15103021225	Black	21,2	M25 x 1,5	14,5	29,5	13,0	73,0	48,0	26	2,300	50
15103028225	Black	28,5	M25 x 1,5	17,0	37,0	13,0	90,0	64,0	32	3,300	25
15103028232	Black	28,5	M32 x 1,5	20,0	37,0	14,0	85,0	64,0	36	3,540	25
15103034232	Black	34,5	M32 x 1,5	23,0	44,0	14,0	100,5	74,0	39	5,000	10
15103034240	Black	34,5	M40 x 1,5	29,0	44,0	14,0	100,5	74,0	45	5,400	10
15103042240	Black	42,5	M40 x 1,5	31,5	52,0	17,0	111,0	82,5	48	6,700	10
15103042250	Black	42,5	M50 x 1,5	36,0	52,0	17,0	111,0	82,5	59	8,700	10
15103054250	Black	54,5	M50 x 1,5	35,5	64,0	17,0	124,5	98,0	60	10,300	5
15103054263	Black	54,5	M63 x 1,5	45,5	64,0	17,0	124,5	97,0	70	11,700	5
15103010012	Grey	10,0	M12 x 1,5	6,5	17,0	10,0	57,0	39,0	18	0,800	50
15103013016	Grey	13,0	M16 x 1,5	8,5	20,0	12,0	59,0	40,5	21	1,000	50
15103015020	Grey	15,8	M20 x 1,5	10,0	23,0	12,0	62,0	45,0	24	1,500	50
15103021020	Grey	21,2	M20 x 1,5	13,0	29,5	12,0	73,0	48,0	26	2,000	50
15103021025	Grey	21,2	M25 x 1,5	14,5	29,5	13,0	73,0	48,0	26	2,300	50
15103028025	Grey	28,5	M25 x 1,5	17,0	37,0	13,0	90,0	64,0	32	3,300	25
15103028032	Grey	28,5	M32 x 1,5	20,0	37,0	14,0	85,0	64,0	36	3,400	25
15103034032	Grey	34,5	M32 x 1,5	23,0	44,0	14,0	100,5	74,0	39	5,000	10



FLEXA No.	Colour	OD [mm]	Thread type	Ø I [mm]	Ø B [mm]	C [mm]	E [mm]	F [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15103034040	Grey	34,5	M40 x 1,5	29,0	44,0	14,0	100,5	74,0	45	5,400	10
15103042040	Grey	42,5	M40 x 1,5	31,5	52,0	17,0	111,0	82,5	48	6,700	10
15103042050	Grey	42,5	M50 x 1,5	36,0	52,0	17,0	111,0	82,5	59	8,700	10
15103054050	Grey	54,5	M50 x 1,5	35,5	64,0	17,0	124,5	98,0	60	10,300	5
15103054063	Grey	54,5	M63 x 1,5	45,5	64,0	17,0	124,5	97,0	70	11,700	5



Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.