




RQBK90-M | metric thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, bend 90°, metric nickel-plated brass outer thread, integrated snap-in sleeve, with sealing, high density, incl. O-ring (OR) and flat sealing (FRH), EN 45545-2 (HL3)

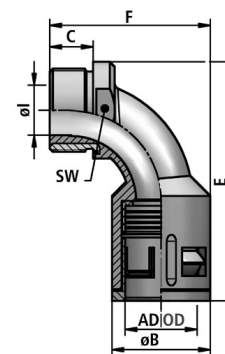

Temperature:	-40°C ... +120°C
Material:	PA plastics nickel-plated brass 58
IP class [acc. to EN 60529]:	IP 68 IP 69K

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- fit for high mechanical stress
- impact-resistant
- high torque of thread connection



ELECTRO-PRODUCTS CORP.

FLEXA No.	Colour	OD [mm]	Thread type	Ø I [mm]	Ø B [mm]	C [mm]	E [mm]	F [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15105010212	Black	10,0	M12 x 1,5	6,5	17,0	10,0	57,0	39,0	18	1,480	50
15105013216	Black	13,0	M16 x 1,5	8,5	20,0	12,0	59,0	40,5	21	1,400	50
15105015220	Black	15,8	M20 x 1,5	10,0	23,0	12,0	62,0	45,0	24	2,400	50
15105021220	Black	21,2	M20 x 1,5	13,0	29,5	12,0	73,0	48,0	26	2,400	50
15105021225	Black	21,2	M25 x 1,5	14,5	29,5	13,0	73,0	48,0	26	3,500	50
15105028225	Black	28,5	M25 x 1,5	17,0	37,0	13,0	90,0	64,0	32	4,840	25
15105028232	Black	28,5	M32 x 1,5	20,0	37,0	14,0	85,0	64,0	36	6,040	25
15105034232	Black	34,5	M32 x 1,5	23,0	44,0	14,0	100,5	74,0	39	8,000	10
15105034240	Black	34,5	M40 x 1,5	29,0	44,0	14,0	100,5	74,0	45	8,000	10
15105042240	Black	42,5	M40 x 1,5	31,5	52,0	17,0	111,0	82,5	48	16,500	10
15105042250	Black	42,5	M50 x 1,5	36,0	52,0	17,0	111,0	82,5	59	16,500	10
15105054250	Black	54,5	M50 x 1,5	35,5	64,0	17,0	124,5	98,0	60	19,000	5
15105054263	Black	54,5	M63 x 1,5	45,5	64,0	17,0	124,5	98,0	60	24,500	5

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.