

RQG-Duo-M

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, straight, separable, metric outer thread, especially for protective conduits ROHRflex-Duo



Temperature: -40°C ... +120°C

Material: PA plastics


IP class [acc. to EN 60529]: IP 50

CHARACTERISTICS:

- Properties: to protect pre-assembled cables
- for retrospective installation or repairs
- simple assembly | disassembly
- IP 50 acc. to EN
- IEC 60529

APPLICATIONS:

- Application: machine and plant constructions / automation / electrical installations

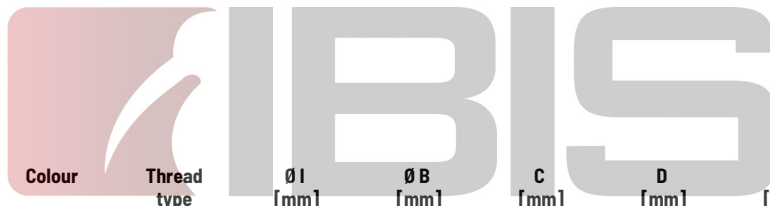

FLEXA No.	OD [mm]	Colour	Thread type	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15128015216	15,8	Black	M16 x 1,5	11,0	30,0	15,0	30,0	26	0,750	10
15128015220	15,8	Black	M20 x 1,5	15,0	30,0	15,0	30,0	26	0,780	10
15128021220	21,2	Black	M20 x 1,5	15,0	32,0	15,0	30,0	28	0,850	10
15128021225	21,2	Black	M25 x 1,5	21,0	32,0	15,0	30,0	28	0,800	10
15128028225	28,5	Black	M25 x 1,5	21,0	40,0	15,0	35,0	36	1,300	10
15128028232	28,5	Black	M32 x 1,5	27,0	40,0	15,0	35,0	36	1,200	5
15128034232	34,5	Black	M32 x 1,5	27,0	50,0	15,0	35,0	46	2,400	5
15128034240	34,5	Black	M40 x 1,5	35,0	50,0	15,0	35,0	46	2,300	5
15128042240	42,5	Black	M40 x 1,5	35,0	62,0	15,0	35,0	55	2,800	5
15128042250	42,5	Black	M50 x 1,5	44,0	62,0	20,0	40,0	55	2,700	5
15128054250	54,5	Black	M50 x 1,5	44,0	72,0	20,0	45,0	65	3,300	5
15128054263	54,5	Black	M63 x 1,5	57,0	72,0	20,0	45,0	65	3,500	5

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.