

RQG1-N | NPT thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, NPT outer thread, integrated snap-in sleeve, conically sealed


Temperature: -40°C ... +120°C

Material: PA plastics

IP class [acc. to EN 60529]: IP 66

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen

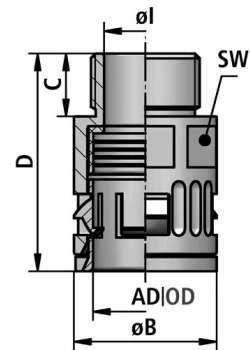

APPLICATIONS:

- Application: machine and plant constructions / automotive / shipbuilding / automation / electrical installations

FLEXA No.	Colour	OD [mm]	Thread type	ø I [mm]	ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15020046205	Black	15,8	NPT 1/2"	12,5	25,0	12,0	39,0	21	0,770	50
15020046206	Black	21,2	NPT 1/2"	17,0	29,5	12,0	43,5	27	1,000	50
15020046214	Black	28,5	NPT 3/4"	20,7	37,0	14,0	47,5	34	1,740	25
15020046210	Black	34,5	NPT 1"	25,7	44,0	14,0	52,0	40	2,200	25
15020046217	Black	42,5	NPT 1 1/4"	34,0	52,0	18,0	77,0	60	4,500	25
15020046209	Black	54,5	NPT 1 1/2"	39,5	64,0	18,0	89,0	70	4,650	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.