


RQG2-U | UNEF thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, UNEF inner thread, integrated snap-in sleeve with sealing, high density

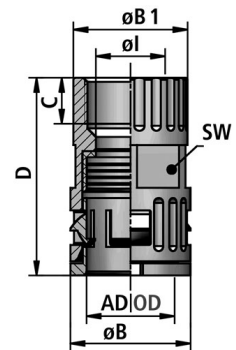

Temperature: -40°C ... +120°C

Material: PA plastics


IP class [acc. to EN 60529]: IP 68 | IP 69K

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

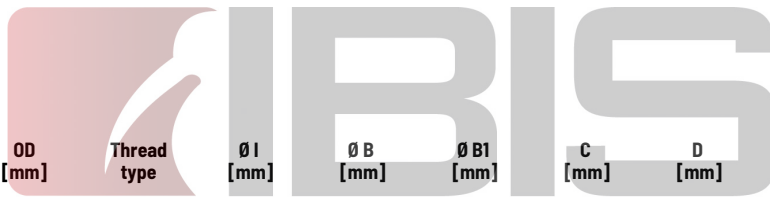

FLEXA No.	Colour	OD [mm]	Thread type	ϕI [mm]	ϕB [mm]	$\phi B 1$ [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15020047202	Black	13,0	UNEF 1/2" -28	10,0	20,0	17,0	8,0	36,6	18	0,500	50
15020047203	Black	13,0	UNEF 5/8" -24	10,0	20,0	20,6	8,0	36,6	18	0,600	50
15020047205	Black	13,0	UNEF 3/4" -20	10,0	23,0	23,0	9,5	38,5	18	0,700	50
15020047204	Black	15,8	UNEF 5/8" -24	12,5	23,5	23,6	9,5	40,0	21	0,760	50
15020047232	Black	15,8	UNEF 11/16" -24	12,5	23,6	23,6	9,5	46,0	21	0,800	50
15020047206	Black	15,8	UNEF 3/4" -20	12,5	23,6	23,6	9,5	41,7	21	0,940	50
15020047225	Black	15,8	UNEF 15/16" -20	12,5	30,0	30,0	9,5	45,5	21	1,300	50
15020047210	Black	15,8	UNEF 1" -20	12,5	30,0	30,0	9,5	45,5	21	1,100	50
15020047239	Black	21,2	UNEF 9/16" -20	12,5	29,5	20,0	8,0	44,6	27	1,100	50
15020047207	Black	21,2	UNEF 5/8" -24	12,5	30,1	30,1	9,5	45,0	27	1,100	50
15020047227	Black	21,2	UNEF 3/4" -20	12,5	30,0	30,0	9,5	51,5	27	1,400	50
15020047208	Black	21,2	UNEF 7/8" -20	17,0	29,5	29,5	9,5	50,5	27	1,540	50
15020047209	Black	21,2	UNEF 5/16" -20	17,0	21,2	30,0	9,5	50,3	27	1,780	50
15020047211	Black	21,2	UNEF 1" -20	17,0	30,1	30,1	9,5	50,3	27	1,720	50
15020047230	Black	21,2	UNEF 1 1/8" -20	17,0	33,5	33,5	9,5	52,5	27	1,700	50
15020047212	Black	21,2	UNEF 1 3/16" -18	17,0	34,6	34,6	9,5	52,3	27	1,980	50
15020047222	Black	21,2	UNEF 1 3/8" -18	17,0	41,0	41,0	9,5	52,5	27	2,200	50
15020047215	Black	21,2	UNEF 1 7/16" -18	17,0	41,0	41,0	9,5	52,5	27	1,900	50
15020047219	Black	21,2	UNEF 1 3/4" -18	17,0	49,0	49,0	9,5	52,5	27	2,560	50
15020047223	Black	28,5	UNEF 15/16" -20	17,0	37,0	37,0	9,5	52,5	34	2,250	25
15020047214	Black	28,5	UNEF 1" -20	23,5	37,0	37,0	9,5	54,0	34	2,200	25
15020047213	Black	28,5	UNEF 1 3/16" -18	23,5	37,0	37,0	9,5	52,5	34	2,240	25



FLEXA No.	Colour	OD [mm]	Thread type	Ø I [mm]	Ø B [mm]	Ø B1 [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15020047216	Black	28,5	UNEF 1 3/8" -18	23,5	41,0	41,0	9,5	54,0	34	2,680	25
15020047217	Black	28,5	UNEF 1 7/16" -18	23,5	41,0	41,0	9,5	54,0	34	2,480	25
15020047236	Black	28,5	UNEF 1 3/4" -18	23,5	49,0	49,0	9,5	54,0	34	3,000	25
15020047233	Black	34,5	UNEF 1" -20	23,5	44,0	43,5	9,5	56,0	40	2,300	10
15020047234	Black	34,5	UNEF 1 3/16" -18	17,0	44,0	43,5	9,5	56,0	40	3,000	10
15020047224	Black	34,5	UNEF 1 3/8" -18	23,5	52,0	52,0	9,5	56,0	40	3,200	10
15020047218	Black	34,5	UNEF 1 7/16" -18	30,5	44,0	44,0	9,5	55,0	40	2,800	10
15020047249	Black	34,5	UNEF 5/8" -18	30,5	44,0	46,0	9,5	56,0	40	2,200	10
15020047220	Black	34,5	UNEF 1 3/4" -18	30,5	49,0	49,0	9,5	56,0	40	2,900	10
15020047221	Black	34,5	UNEF 2" -18	30,5	55,0	55,0	9,5	56,0	40	3,200	10
15020047231	Black	42,5	UNEF 1 3/16" -18	23,0	52,0	52,0	9,5	56,0	48	4,100	10
15020047228	Black	42,5	UNEF 1 7/16" -18	30,5	52,0	52,0	9,5	57,0	48	3,100	10
15020047229	Black	42,5	UNEF 1 3/4" -18	30,5	52,0	52,0	9,5	58,5	48	4,200	10
15020047238	Black	42,5	UNEF 2" -18	30,5	54,5	54,5	9,5	60,0	48	4,300	10
15020047237	Black	42,5	UNEF 2 1/4" -16	30,5	66,5	66,5	18,0	70,0	48	5,500	10
15020047235	Black	54,5	UNEF 2 1/4" -16	49,5	64,0	66,5	18,0	70,0	60	6,100	10



Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.