


RQGKZ-P | PG thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, PG nickel-plated brass outer thread, integrated snap-in sleeve with sealing, strain relief, high density, EN 45545-2 (HL3)

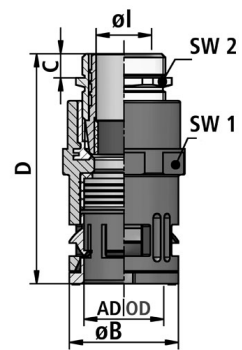

Temperature:	-40°C ... +120°C
Material:	PA plastics nickel-plated brass 58
IP class [acc. to EN 60529]:	IP 68 IP 69K

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- fit for high mechanical stress
- impact-resistant
- high torque of thread connection
- optimal held and sealing of cables at the same time



To ensure a high protection system between cable gland insert and screw connector housing it is necessary to use a sealing compound. (please see our assembly instructions)

ELECTRO-PRODUCTS CORP.

FLEXA No.	OD [mm]	Colour	Thread type	Clamp.range [mm]	ø I [mm]	ø B [mm]	C [mm]	D [mm]	WS1 [mm]	WS2 [mm]	Weight [kg/100]	PU [pcs.]
15500010207	10,0	Black	PG7	3,0-6,0	6,8	20,5	5,0	50,0	18	14	1,750	50
15500013209	13,0	Black	PG9	4,0-7,5	8,5	24,0	6,0	56,5	22	17	2,600	50
15500015211	15,8	Black	PG11	4,0-9,5	10,5	27,0	6,0	57,0	25	20	3,500	50
15500021216	21,2	Black	PG16	9,0-13,0	14,8	33,0	6,5	65,0	31	24	5,120	25
15500028221	28,5	Black	PG21	11,5-17,0	18,5	41,0	7,0	71,0	39	30	8,480	25
15500034229	34,5	Black	PG29	19,0-23,0	25,5	48,5	8,0	75,0	46	40	13,280	25
15500042236	42,5	Black	PG36	25,0-33,0	34,5	58,0	9,0	103,0	55	50	17,800	10
15500054248	54,5	Black	PG48	35,0-43,0	44,0	68,0	10,0	120,0	65	64	33,900	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.