




RQGZ-N | NPT thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, NPT outer thread, integrated snap-in sleeve with sealing, strain relief, high density

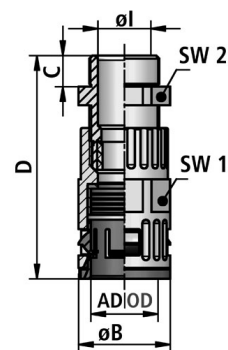


Temperature:	-40°C ... +120°C
Material:	PA plastics
IP class [acc. to EN 60529]:	IP 68   IP 69K

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- optimal held and sealing of cables at the same time

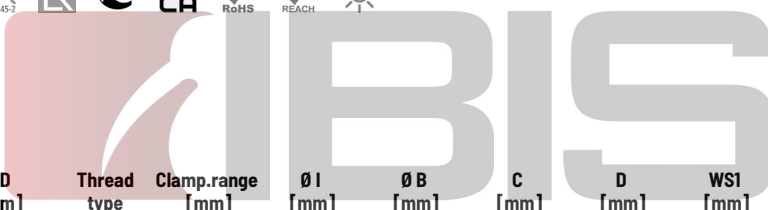

FLEXA No.	Colour	OD [mm]	Thread type	Clamp.range [mm]	Ø 1 [mm]	Ø B [mm]	C [mm]	D [mm]	WS1 [mm]	WS2 [mm]	Weight [kg/100]	PU [pcs.]
15704015205	Black	15,8	1/2 inch	6,0-12,0	12,0	27,0	15,0	69,0	21	24	1,600	20
15704021205	Black	21,2	1/2 inch	7,0-10,0	12,0	29,5	15,0	73,0	27	24	2,200	10
15704028214	Black	28,5	3/4 inch	12,0-18,0	18,0	37,0	15,0	79,0	34	33	3,400	10
15704034210	Black	34,5	1 inch	21,0-25,0	25,0	44,0	18,0	89,0	40	42	5,000	10
15704042217	Black	42,5	1 1/4 inch	24,0-32,0	32,0	52,0	19,0	100,0	49	53	8,900	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.