


RQGZ-P | PG thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, PG outer thread, integrated snap-in sleeve with sealing, strain relief, high density



Temperature: -40°C ... +120°C

Material: PA plastics


IP class [acc. to EN 60529]: IP 68 | IP 69K

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- optimal held and sealing of cables at the same time

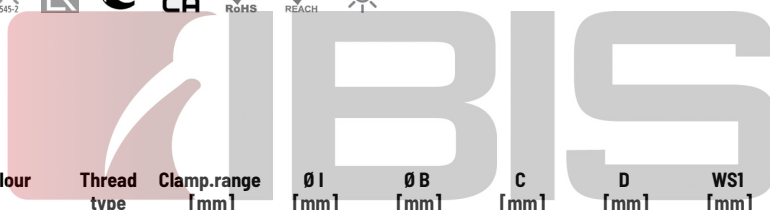FLEXA No.	OD [mm]	Colour	Thread type	Clamp.range [mm]	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS1 [mm]	WS2 [mm]	Weight [kg/100]	PU [pcs.]
15020034207	10,0	Black	PG7	3,0-6,5	7,0	17,0	8,0	51,0	16	15	0,800	20
15020034209	13,0	Black	PG9	4,0-8,0	8,0	20,0	8,0	53,0	18	19	1,050	20
15020034211	15,8	Black	PG11	5,0-10,0	10,0	23,0	8,0	59,0	21	22	1,450	20
15020034213	15,8	Black	PG13,5	6,0-11,0	11,0	27,0	9,0	59,0	21	24	1,600	20
15020034214	18,5	Black	PG13,5	6,0-12,0	12,0	27,0	9,0	59,0	24	24	1,600	20
15020034215	21,2	Black	PG13,5	6,0-12,0	12,0	29,5	9,0	70,0	27	24	2,200	10
15020034216	21,2	Black	PG16	10,0-14,0	14,0	29,5	10,0	72,0	27	27	2,300	10
15020034221	28,5	Black	PG21	13,0-18,0	20,0	37,0	11,0	82,0	34	33	3,500	10
15020034229	34,5	Black	PG29	18,0-25,0	25,0	44,0	11,0	85,0	40	42	5,000	10
15020034236	42,5	Black	PG36	22,0-32,0	32,0	58,0	13,0	140,0	55	53	8,500	10
15020034248	54,5	Black	PG48	34,0-44,0	44,0	68,0	14,0	144,0	65	65	11,200	10
15020034007	10,0	Grey	PG7	3,0-6,5	7,0	17,0	8,0	51,0	16	15	0,800	20
15020034009	13,0	Grey	PG9	4,0-8,0	8,0	20,0	8,0	53,0	18	19	1,050	20
15020034011	15,8	Grey	PG11	5,0-10,0	10,0	23,0	8,0	59,0	21	22	1,450	20
15020034013	15,8	Grey	PG13,5	6,0-11,0	11,0	27,0	9,0	59,0	21	24	1,600	20
15020034014	18,5	Grey	PG13,5	6,0-12,0	12,0	27,0	9,0	59,0	24	24	1,600	20
15020034015	21,2	Grey	PG13,5	6,0-12,0	12,0	29,5	9,0	70,0	27	24	2,200	10
15020034016	21,2	Grey	PG16	10,0-14,0	14,0	29,5	10,0	72,0	27	27	2,300	10
15020034021	28,5	Grey	PG21	13,0-18,0	20,0	37,0	11,0	82,0	34	33	3,500	10
15020034029	34,5	Grey	PG29	18,0-25,0	25,0	44,0	11,0	85,0	40	42	5,000	10
15020034036	42,5	Grey	PG36	22,0-32,0	32,0	58,0	13,0	140,0	55	53	8,500	10



FLEXA No.	OD [mm]	Colour	Thread type	Clamp.range [mm]	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS1 [mm]	WS2 [mm]	Weight [kg/100]	PU [pcs.]
15020034048	54,5	Grey	PG48	34,0-44,0	44,0	68,0	14,0	144,0	65	65	11,200	10



Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.