


## RQH

### Tubing clamp systems for light, medium and heavy duty applications

Tubing clamp for light applications with through hole for fastening by screws, ribbed fixing for strain relief, assembly of varying sizes joined feasible, applicable in combination with C-profile bars, V2 (UL 94)

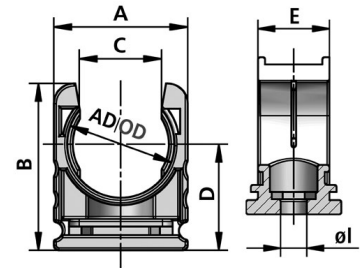

**Temperature:** -40°C ... +120°C


**Material:** PA plastics

#### CHARACTERISTICS:

- Properties: ribbed fixing
- for strain relief
- assembly of varying sizes joined in line
- using in combination with C-profile bar

#### APPLICATIONS:

- Application: for light applications / machine and plant constructions / insulated electrical installations for application rules machine and plant constructions acc. to DIN EN 60204

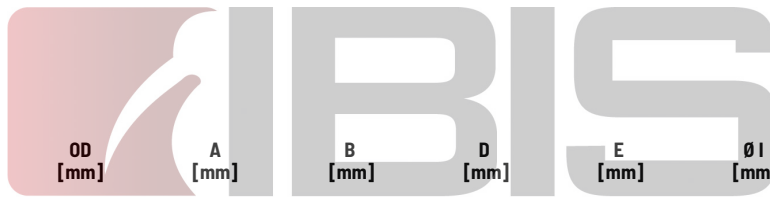

FLEXA No.	Colour	OD [mm]	A [mm]	B [mm]	D [mm]	E [mm]	Ø I [mm]	Weight [kg/100]	PU [pcs.]
15030025207	Black	10,0	19,5	19,0	13,0	15,0	5,5	0,340	50
15030025209	Black	13,0	19,5	22,6	14,5	15,0	5,5	0,340	50
15030025211	Black	15,8	21,5	25,4	16,1	15,0	5,5	0,360	50
15030025213	Black	18,5	24,5	29,0	18,0	15,0	5,5	0,500	50
15030025216	Black	21,2	26,5	33,0	21,0	15,0	6,5	0,540	50
15030025221	Black	28,5	34,7	39,4	22,7	15,0	6,5	0,760	25
15030025229	Black	34,5	40,0	44,4	26,0	15,0	6,5	0,880	25
15030025236	Black	42,5	54,0	55,5	30,0	20,0	6,5	2,000	25
15030025248	Black	54,5	67,0	69,0	39,0	17,0	6,5	2,600	10
15030025007	Grey	10,0	19,5	19,0	13,0	15,0	5,5	0,340	50
15030025009	Grey	13,0	19,5	22,6	14,5	15,0	5,5	0,340	50
15030025011	Grey	15,8	21,5	25,4	16,1	15,0	5,5	0,360	50
15030025013	Grey	18,5	24,5	29,0	18,0	15,0	5,5	0,500	50
15030025016	Grey	21,2	26,5	33,0	21,0	15,0	6,5	0,540	50
15030025021	Grey	28,5	34,7	39,4	22,7	15,0	6,5	0,760	25
15030025029	Grey	34,5	40,0	44,4	26,0	15,0	6,5	0,880	25
15030025036	Grey	42,5	54,0	55,5	30,0	20,0	6,5	2,000	25
15030025048	Grey	54,5	67,0	69,0	39,0	17,0	6,5	2,600	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.