

RQPRO

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Heavy abrasion protector incl. screws made of stainless steel, to protect the tubing installation, mainly for extremely mechanical stresses, EN 45545-2 (HL3)

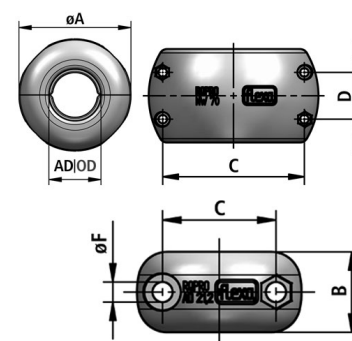
Temperature: -40°C ... +120°C

Material: PA plastics

CHARACTERISTICS:

- Properties: free of silicone, cadmium, halogen
- self-extinguishing
- fit for high mechanical stress
- impact-resistant

- incl. stainless steel screw with self-locking nut
Application: to protect the tubing installation mainly for extremely mechanical stresses by automation or railway


APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations



IBIS

ELECTRO PRODUCTS CORP.

| FLEXA No. | Colour | OD [mm] | Ø A [mm] | B [mm] | C [mm] | D [mm] | Weight [kg/100] | PU [pcs.] |
|-------------|--------|------------|-------------|-----------|-----------|-----------|--------------------|--------------|
| 15524021200 | Black | 21,2 | 45,0 | 22,0 | 31,0 | 0 | 2,330 | 25 |
| 15524028200 | Black | 28,5 | 52,0 | 26,0 | 39,0 | 0 | 2,900 | 25 |
| 15524034200 | Black | 34,5 | 58,0 | 26,0 | 45,0 | 0 | 3,270 | 10 |
| 15524042200 | Black | 42,5 | 66,0 | 30,0 | 54,0 | 0 | 4,050 | 10 |
| 15524054200 | Black | 54,5 | 77,0 | 30,0 | 65,0 | 0 | 4,900 | 5 |
| 15524079200 | Black | 79,2 | 108,0 | 60,0 | 90,9 | 30,0 | 14,550 | 5 |

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.