




RQT-PA

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector quick-type, T distributor for rational tubing assembly by just putting on, high density, EN 45545-2 (HL3)

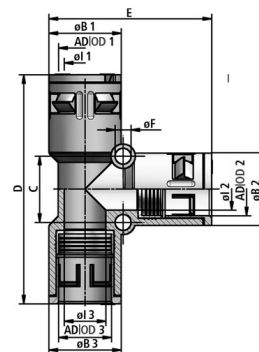

Temperature:	-40°C ... +120°C
Material:	PA plastics
IP class [acc. to EN 60529]:	IP 68   IP 69K

APPLICATIONS:

- Application: for static and dynamic applications indoor and outdoor of railway cars / heavy machine and plant constructions / insulated electrical installations for application rules machine and plant constructions acc. to DIN EN 60204



FLEXA No.	Colour	OD [mm]	Ø B2 [mm]	Ø B1 3 [mm]	E [mm]	D [mm]	Ø F [mm]	C [mm]	Weight [kg/100]	PU [pcs.]
15020041208	Black	OD1/OD3 - 15,8 / OD2 - 15,8	23,0	23,0	54,5	80,0	5,5	20,0	2,200	10
15020041201	Black	OD1/OD3 - 21,2 / OD2 - 21,2	29,5	29,5	66,0	93,5	6,5	27,0	4,100	10
15020041202	Black	OD1/OD3 - 28,5 / OD2 - 28,5	37,0	37,0	78,0	107,0	6,5	34,0	5,900	10
15020041210	Black	OD1/OD3 - 28,5 / OD2 - 34,5	44,0	37,0	77,0	113,0	6,5	38,0	6,900	10
15020041211	Black	OD1/OD3 - 34,5 / OD2 - 34,5	44,0	44,0	90,5	119,0	6,5	40,0	8,100	10
15020041212	Black	OD1/OD3 - 42,5 / OD2 - 42,5	52,0	52,0	94,5	138,0	6,5	45,0	11,700	10
15020041213	Black	OD1/OD3 - 54,5 / OD2 - 54,5	64,0	64,0	105,0	146,0	6,5	56,5	15,800	5
15020041008	Grey	OD1/OD3 - 15,8 / OD2 - 15,8	23,0	23,0	54,5	80,0	5,5	20,0	2,200	10
15020041001	Grey	OD1/OD3 - 21,2 / OD2 - 21,2	29,5	29,5	66,0	93,5	6,5	27,0	4,100	10
15020041002	Grey	OD1/OD3 - 28,5 / OD2 - 28,5	37,0	37,0	78,0	107,0	6,5	34,0	5,900	10
15020041010	Grey	OD1/OD3 - 28,5 / OD2 - 34,5	44,0	37,0	77,0	113,0	6,5	38,0	6,900	10
15020041011	Grey	OD1/OD3 - 34,5 / OD2 - 34,5	44,0	44,0	90,5	119,0	6,5	40,0	8,100	10
15020041012	Grey	OD1/OD3 - 42,5 / OD2 - 42,5	52,0	52,0	94,5	138,0	6,5	45,0	11,700	10
15020041013	Grey	OD1/OD3 - 54,5 / OD2 - 54,5	64,0	64,0	105,0	146,0	6,5	56,5	15,800	5

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.