


RQW-M | metric thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, elbow 90°, metric outer thread, integrated snap-in sleeve with sealing, high density



Temperature: -40°C ... +120°C

Material: PA plastics


IP class [acc. to EN 60529]: IP 68 | IP 69K

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

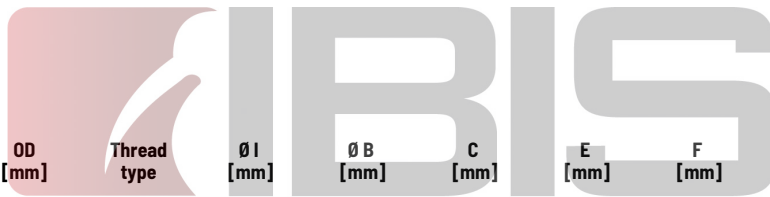

FLEXA No.	Colour	OD [mm]	Thread type	Ø I [mm]	Ø B [mm]	C [mm]	E [mm]	F [mm]	Ø D [mm]	Weight [kg/100]	PU [pcs.]
15020064210	Black	10,0	M10 x 1,0	6,0	17,0	12,0	33,5	34,5	16,0	0,600	50
15020064212	Black	13,0	M12 x 1,5	8,0	20,0	10,0	36,0	34,0	20,0	0,760	50
15020036216	Black	13,0	M16 x 1,5	12,0	20,0	12,0	36,0	36,5	20,0	0,720	50
15020064216	Black	15,8	M16 x 1,5	12,0	23,0	12,0	42,0	40,5	24,5	1,080	50
15020036220	Black	15,8	M20 x 1,5	15,5	23,0	13,0	42,0	41,5	24,5	1,060	50
15020064220	Black	21,2	M20 x 1,5	14,8	29,5	13,0	50,0	49,0	27,0	2,000	50
15020036225	Black	21,2	M25 x 1,5	18,0	29,5	13,0	50,0	49,0	29,5	1,940	50
15020064225	Black	28,5	M25 x 1,5	19,0	37,0	13,0	57,0	57,0	34,0	3,120	25
15020036232	Black	28,5	M32 x 1,5	24,0	37,0	15,0	57,0	59,0	37,0	3,040	25
15020064232	Black	34,5	M32 x 1,5	24,0	44,0	15,0	67,5	65,0	43,0	4,800	10
15020036240	Black	34,5	M40 x 1,5	32,0	44,0	15,0	67,5	67,0	45,0	4,400	10
15020064240	Black	42,5	M40 x 1,5	32,0	52,0	15,0	83,0	72,0	51,5	7,000	10
15020036250	Black	42,5	M50 x 1,5	39,0	52,0	15,5	83,0	74,5	55,0	7,300	10
15020064250	Black	54,5	M50 x 1,5	39,0	64,0	15,0	94,0	84,0	64,0	11,400	5
15020036263	Black	54,5	M63 x 1,5	53,0	64,0	16,0	94,0	85,5	68,0	10,800	5
15020064010	Grey	10,0	M10 x 1,0	6,0	17,0	12,0	33,5	34,5	16,0	0,600	50
15020064012	Grey	13,0	M12 x 1,5	8,0	20,0	10,0	36,0	40,0	20,0	0,760	50
15020036016	Grey	13,0	M16 x 1,5	12,0	20,0	12,0	36,0	36,5	20,0	0,720	50
15020064016	Grey	15,8	M16 x 1,5	12,0	23,0	12,0	42,0	40,5	24,5	1,080	50
15020036020	Grey	15,8	M20 x 1,5	15,5	23,0	13,0	42,0	41,5	24,5	1,060	50
15020064020	Grey	21,2	M20 x 1,5	14,8	29,5	13,0	50,0	49,0	27,0	2,000	50



FLEXA No.	Colour	OD [mm]	Thread type	Ø I [mm]	Ø B [mm]	C [mm]	E [mm]	F [mm]	Ø D [mm]	Weight [kg/100]	PU [pcs.]
15020036025	Grey	21,2	M25 x 1,5	18,0	29,5	13,0	50,0	49,0	29,5	1,940	50
15020064025	Grey	28,5	M25 x 1,5	19,0	37,0	13,0	57,0	57,0	34,0	3,120	25
15020036032	Grey	28,5	M32 x 1,5	24,0	37,0	15,0	57,0	59,0	37,0	3,040	25
15020064032	Grey	34,5	M32 x 1,5	24,0	44,0	15,0	67,5	65,0	43,0	4,800	10
15020036040	Grey	34,5	M40 x 1,5	32,0	44,0	15,0	67,5	67,0	45,0	4,400	10
15020064040	Grey	42,5	M40 x 1,5	32,0	52,0	15,0	83,0	72,0	51,5	7,000	10
15020036050	Grey	42,5	M50 x 1,5	39,0	52,0	15,5	83,0	74,5	55,0	7,300	10
15020064050	Grey	54,5	M50 x 1,5	39,0	64,0	15,0	94,0	84,0	64,0	11,400	5
15020036063	Grey	54,5	M63 x 1,5	53,0	64,0	16,0	94,0	85,5	68,0	10,800	5



Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.