


RQW-N | NPT thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, elbow 90°, NPT outer thread, integrated snap-in sleeve with sealing, high density



Temperature: -40°C ... +120°C

Material: PA plastics


IP class [acc. to EN 60529]: IP 68 | IP 69K

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

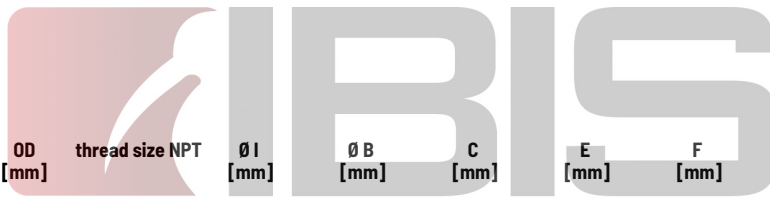

FLEXA No.	Colour	OD [mm]	thread size NPT	Ø I [mm]	Ø B [mm]	C [mm]	E [mm]	F [mm]	Ø D [mm]	Weight [kg/100]	PU [pcs.]
15020057201	Black	10,0	1/4 inch	8,5	17,0	10,0	34,0	33,0	16,0	0,400	50
15020057202	Black	13,0	1/4 inch	10,0	20,0	10,5	36,0	35,0	20,0	0,600	50
15020057204	Black	15,8	3/8"	12,5	26,0	12,0	44,0	44,0	24,5	0,800	50
15020057205	Black	15,8	1/2 inch	14,0	23,5	12,0	42,0	40,5	26,0	1,100	50
15020057206	Black	21,2	1/2 inch	16,0	29,5	13,0	51,0	48,5	27,0	1,880	50
15020039221	Black	28,5	3/4 inch	21,0	37,0	14,0	57,5	57,0	34,0	3,040	25
15020039228	Black	34,5	1 inch	28,0	44,0	16,0	67,5	67,5	43,0	4,800	10
15020057207	Black	42,5	1 1/4 inch	35,0	52,0	18,0	83,0	76,0	52,0	6,900	10
15020057208	Black	42,5	1 1/2 inch	36,5	54,0	16,5	83,0	76,0	56,0	7,350	10
15020057209	Black	54,5	1 1/2 inch	41,0	64,0	18,0	95,0	87,0	64,5	11,800	5
15020057210	Black	54,5	2 inch	52,0	66,0	21,0	100,0	90,0	65,0	10,900	5

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.