

## SPR-AS

## Protective metal conduits

Protective metal conduit, strip-wound, s profile


**Temperature:** -50°C ... +250°C

**Material:** galvanized steel

**IP class [acc. to EN 60529]:** IP 40

## CHARACTERISTICS:

- Properties: highly flexible
- stretch resistant
- lateral compression resistant
- DIN 49012, structural shape G, acc. to DIN EN IEC 61386-23

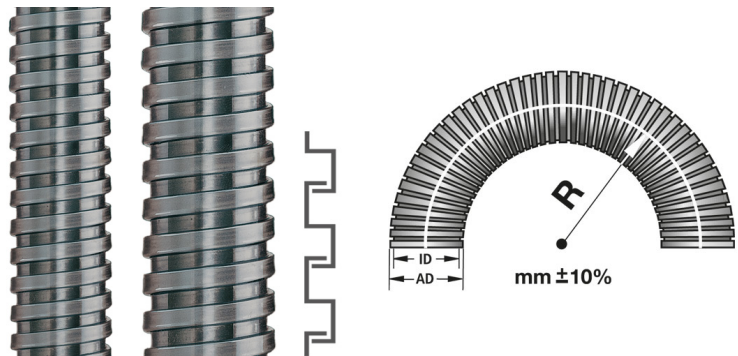

## APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations / ex-area acc. to EN 1127-1



FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
1101011008	Zinc	10,0	8,0	10,0	20	50	0,053	50
1101011011	Zinc	14,0	11,0	14,0	28	70	0,119	50
1101011014	Zinc	17,0	14,0	17,0	30	75	0,140	50
1101011016	Zinc	19,0	16,0	19,0	35	90	0,150	50
1101011018	Zinc	21,0	18,0	21,0	40	100	0,210	50
1101011023	Zinc	27,0	23,0	27,0	48	120	0,260	50
1101011031	Zinc	36,0	31,0	36,0	60	150	0,480	25
1101011040	Zinc	45,0	40,0	45,0	82	205	0,620	25
1101011051	Zinc	56,0	51,0	56,0	100	250	0,800	25
1101111008	Zinc	10,0	8,0	10,0	20	50	0,053	10
1101111011	Zinc	14,0	11,0	14,0	28	70	0,119	10
1101111014	Zinc	17,0	14,0	17,0	30	75	0,140	10
1101111016	Zinc	19,0	16,0	19,0	35	90	0,150	10
1101111018	Zinc	21,0	18,0	21,0	40	100	0,210	10
1101111023	Zinc	27,0	23,0	27,0	48	120	0,260	10
1101111031	Zinc	36,0	31,0	36,0	60	150	0,480	10
1101111040	Zinc	45,0	40,0	45,0	82	205	0,620	10
1101111051	Zinc	56,0	51,0	56,0	100	250	0,800	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.