

## SPR-CU-AS


### Protective metal conduits

Protective metal conduit, strip-wound, s profile, CU braiding

<b>Temperature:</b>	-50°C ... +250°C
<b>Material:</b>	galvanized steel   tinned copper
<b>IP class [acc. to EN 60529]:</b>	IP 40

#### CHARACTERISTICS:

- Properties: high tensile, torsional, and bending strength
- highly flexible
- no fraying of the conduit
- approved acc. to DIN EN IEC 61386-23
- screening factor up to 30 MHz acc. to EN 50289-1-6 up to 80 dB

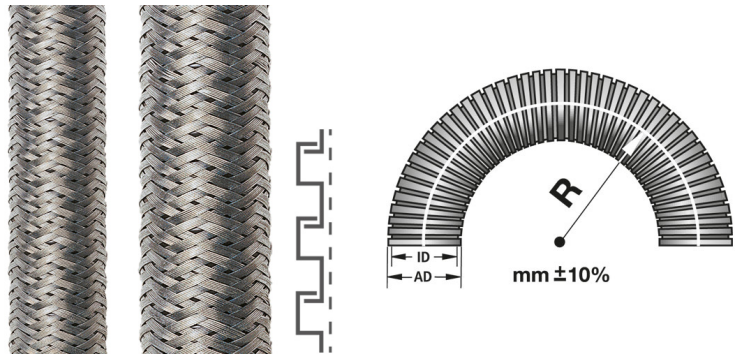

#### APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations / emc applications



FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
14016701007	Copper	10,0	7,0	10,0	16	40	0,120	50
14016701010	Copper	14,0	10,0	14,0	22	55	0,180	50
14016701013	Copper	17,0	13,0	17,0	30	75	0,230	50
14016701017	Copper	21,0	17,0	21,0	38	95	0,350	50
14016701022	Copper	27,0	22,0	27,0	45	115	0,510	50
14016701029	Copper	36,0	29,0	36,0	65	160	0,750	25
14016701038	Copper	45,0	38,0	45,0	80	200	1,000	25
14016701049	Copper	56,0	49,0	56,0	100	250	1,350	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.