

## SPR-PA


## Protective metal conduits liquid tight

Protective metal conduit, strip-wound, s profile, PA sheathing

**Temperature:** -50°C ... +120°C ^ +150°C

**Material:** cold strip galvanized | PA

**IP class [acc. to EN 60529]:** IP 68

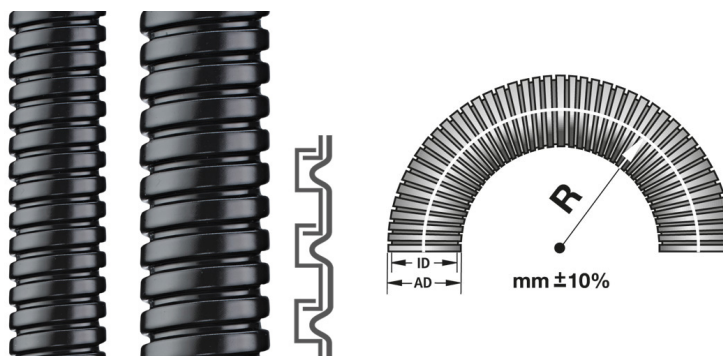

FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
12013202007	Black	10,0	7,0	10,0	25	65	0,085	50
12013202010	Black	14,0	10,0	14,0	37	95	0,110	50
12013202013	Black	17,0	13,0	17,0	45	115	0,148	50
12013202015	Black	19,0	15,0	19,0	50	120	0,150	50
12013202017	Black	21,0	17,0	21,0	55	140	0,220	50
12013202022	Black	27,0	22,0	27,0	60	150	0,320	50
12013202029	Black	36,0	29,0	36,0	90	225	0,600	25
12013202038	Black	45,0	38,0	45,0	120	300	0,680	25
12013202049	Black	56,0	49,0	56,0	130	325	0,800	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.