

## SPR-PU-AS

### Protective metal conduits liquid tight

Protective metal conduit, strip-wound, s profile, PU sheathing, V2 (UL 94)


**Temperature:** -50°C ... +100°C ^ +130°C

**Material:** cold strip galvanized | PU

**IP class [acc. to EN 60529]:** IP 68

#### CHARACTERISTICS:

- Properties: V2 according to UL 94
- oil, benzine, and grease resistant
- widely resistant to solvents and acids
- free of halogen, silicone, cadmium
- high tenacity and abrasion resistance
- outstanding performance at low temperatures
- very flexible
- microbe resistant
- DIN 49012, structural shape I, approved acc. to DIN EN IEC 61386-23

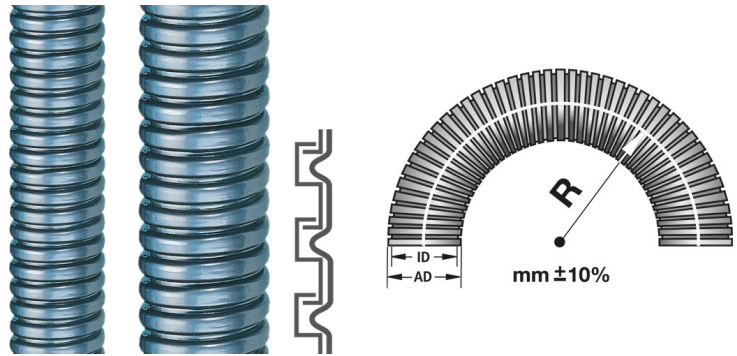

#### APPLICATIONS:

- Application: machine and plant constructions / automotive / shipbuilding / automation / electrical installations



**IBIS**  
ELECTRO-PRODUCTS CORP.

FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
12210711007	Blue	10,0	7,0	10,0	25	65	0,077	50
12210711010	Blue	14,0	10,0	14,0	37	95	0,120	50
12210711013	Blue	17,0	13,0	17,0	45	115	0,150	50
12210711017	Blue	21,0	17,0	21,0	55	140	0,230	50
12210711022	Blue	27,0	22,0	27,0	60	150	0,320	50
12210711029	Blue	36,0	29,0	36,0	90	225	0,560	25
12210711038	Blue	45,0	38,0	45,0	120	300	0,720	25
12210711049	Blue	56,0	49,0	56,0	130	325	0,900	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.