

## SPR-PU-F

## Protective metal conduits liquid tight

Protective metal conduit, s profile, flame retardant PU sheathing, V0 (UL 94), EN 45545-2 (R22;HL2), (R23;HL3)


**Temperature:** -50°C ... +100°C ^ +130°C

**Material:** galvanized steel | PU

**IP class [acc. to EN 60529]:** IP 68

## CHARACTERISTICS:

- Properties: V0 according to UL 94
- flame-retardant
- self-extinguishing
- weatherproof
- widely resistant to seawater, acids and oils
- free of halogen, silicone, cadmium
- compression-resistant
- microbe resistant
- approved acc. to DIN 5510, part 2 EN45545-HL3 NFF 16-101
- 102 DIN EN IEC 61386-23

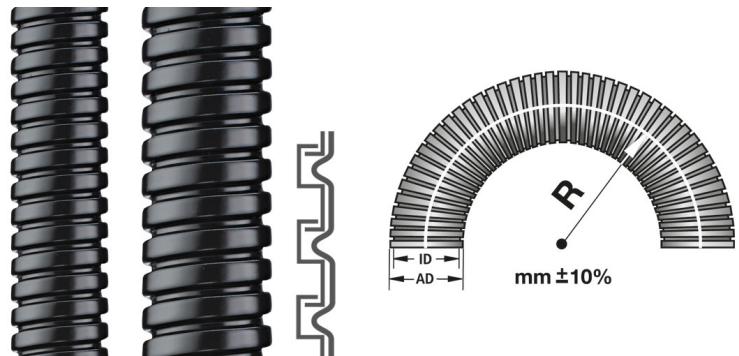

## APPLICATIONS:

- Application: machine and plant constructions / automotive/ railway industry / shipbuilding / automation / electrical installations



**IBIS**  
ELECTRO-PRODUCTS CORP.

FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
12213702007	Black	10,0	7,0	10,0	25	65	0,077	50
12213702010	Black	14,0	10,0	14,0	37	95	0,120	50
12213702013	Black	17,0	13,0	17,0	45	115	0,150	50
12213702017	Black	21,0	17,0	21,0	55	140	0,230	50
12213702022	Black	27,0	22,0	27,0	60	150	0,320	50
12213702029	Black	36,0	29,0	36,0	90	225	0,620	25
12213702038	Black	45,0	38,0	45,0	120	300	0,820	25
12213702049	Black	56,0	49,0	56,0	130	325	1,080	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.