

SPR-PVC-AS

Protective metal conduits liquid tight

Protective metal conduit, strip-wound, s profile, PVC sheathing


Temperature: -25°C ... +90°C ^ +100°C

Material: cold strip galvanized | PVC

IP class [acc. to EN 60529]: IP 68

CHARACTERISTICS:

- Properties: weatherproof
- watertight
- widely resistant to seawater, acids, oils
- free of silicone and cadmium
- very flexible
- stretch-resistant
- compression-resistant
- DIN 49012, structural shape I, approved acc. to DIN EN IEC 61386-23

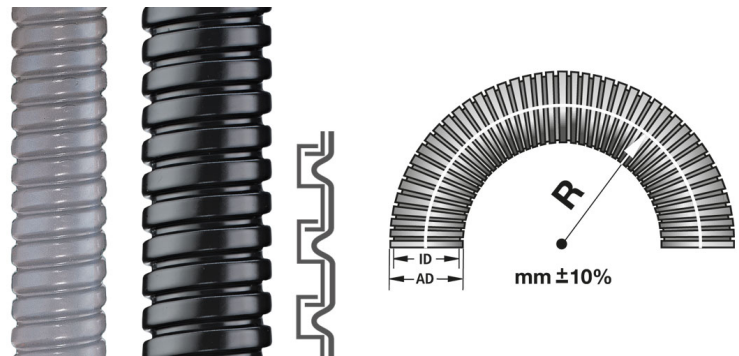

APPLICATIONS:

- Application: machine and plant constructions / shipbuilding / automation / electrical installations / sensor technology



IBIS
ELECTRO-PRODUCTS CORP.

FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
12010112007	Black	10,0	7,0	10,0	25	65	0,079	50
12010112010	Black	14,0	10,0	14,0	37	95	0,130	50
12010112013	Black	17,0	13,0	17,0	45	115	0,170	50
12010112015	Black	19,0	15,0	19,0	50	120	0,190	50
12010112017	Black	21,0	17,0	21,0	55	140	0,240	50
12010112022	Black	27,0	22,0	27,0	60	150	0,360	50
12010112029	Black	36,0	29,0	36,0	90	225	0,600	25
12010112038	Black	45,0	38,0	45,0	120	300	0,740	25
12010112049	Black	56,0	49,0	56,0	130	325	0,900	25
12011112007	Black	10,0	7,0	10,0	25	65	0,079	10
12011112010	Black	14,0	10,0	14,0	37	95	0,130	10
12011112013	Black	17,0	13,0	17,0	45	115	0,170	10
12011112015	Black	19,0	15,0	19,0	50	120	0,190	10
12011112017	Black	21,0	17,0	21,0	55	140	0,240	10
12011112022	Black	27,0	22,0	27,0	60	150	0,360	10
12011112029	Black	36,0	29,0	36,0	90	225	0,600	10
12011112038	Black	45,0	38,0	45,0	120	300	0,740	10
12011112049	Black	56,0	49,0	56,0	130	325	0,900	10
12010111007	Grey	10,0	7,0	10,0	25	65	0,079	50
12010111010	Grey	14,0	10,0	14,0	37	95	0,130	50



FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
12010111013	Grey	17,0	13,0	17,0	45	115	0,170	50
12010111015	Grey	19,0	15,0	19,0	50	120	0,190	50
12010111017	Grey	21,0	17,0	21,0	55	140	0,240	50
12010111022	Grey	27,0	22,0	27,0	60	150	0,360	50
12010111029	Grey	36,0	29,0	36,0	90	225	0,600	25
12010111038	Grey	45,0	38,0	45,0	120	300	0,740	25
12010111049	Grey	56,0	49,0	56,0	130	325	0,900	25
12011111007	Grey	10,0	7,0	10,0	25	65	0,079	10
12011111010	Grey	14,0	10,0	14,0	37	95	0,130	10
12011111013	Grey	17,0	13,0	17,0	45	115	0,170	10
12011111015	Grey	19,0	15,0	19,0	50	120	0,190	10
12011111017	Grey	21,0	17,0	21,0	55	140	0,240	10
12011111022	Grey	27,0	22,0	27,0	60	150	0,360	10
12011111029	Grey	36,0	29,0	36,0	90	225	0,600	10
12011111038	Grey	45,0	38,0	45,0	120	300	0,740	10
12011111049	Grey	56,0	49,0	56,0	130	325	0,900	10



Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.