

SPR-PVC-EDU-AS

Protective metal conduits liquid tight

Protective metal conduit, strip-wound, s profile, PVC sheathing, galvanized steel wire braiding


Temperature: -25°C ... +90°C ^ +100°C

Material: cold strip galvanized | PVC | galvanized steel

IP class [acc. to EN 60529]: IP 68


CHARACTERISTICS:

- Properties: protection from hot swarfs
- widely resistant against oils
- free of silicone and cadmium
- very flexible
- DIN 49012, structural shape M approved acc. to DIN EN IEC 61386-23

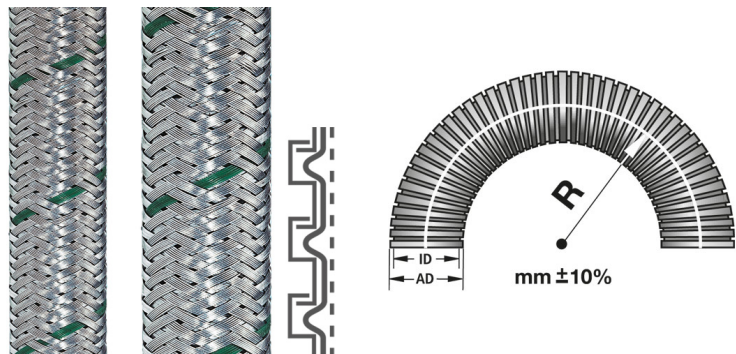

APPLICATIONS:

- Application: machine and plant constructions / injection moulding machines / metal cutting machines / automotive / shipbuilding / automation / electrical installations

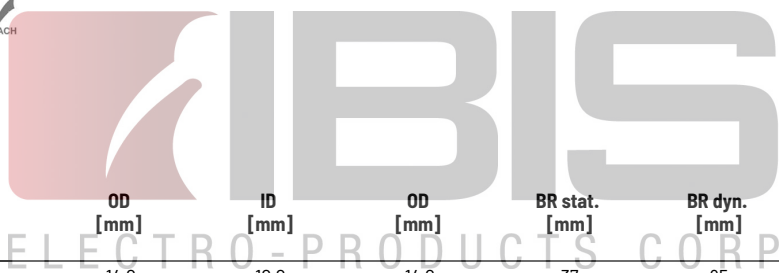

FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
14210101009		14,0	10,0	14,0	37	95	0,180	50
14210101012		17,0	12,0	17,0	49	115	0,280	50
14210101016		21,0	16,0	21,0	55	140	0,330	50
14210101021		27,0	21,0	27,0	60	150	0,510	50
14210101028		36,0	28,0	36,0	90	225	0,800	25
14210101037		45,0	37,0	45,0	120	300	1,060	25
14210101047		56,0	48,0	56,0	130	325	1,320	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.