

## SPR-VA

## Protective metal conduits

Protective metal conduit, strip-wound, s profile


**Temperature:** -200°C ... +600°C

**Material:** stainless steel

**IP class [acc. to EN 60529]:** IP 40

## CHARACTERISTICS:

- Properties: highly flexible
- stretch resistant
- lateral compression resistant

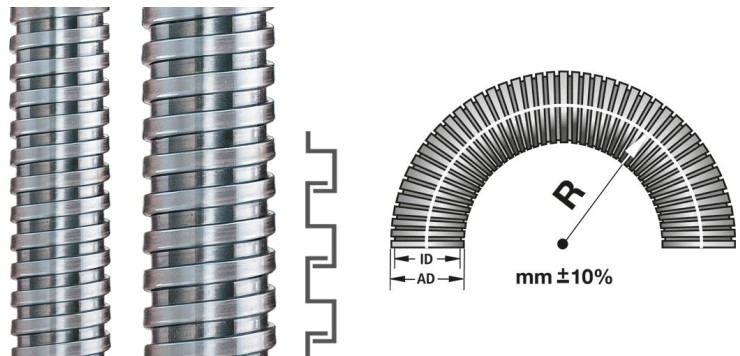

## APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations / sensor technology / ex-area acc. to EN 1127-1



FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
11010801008	Stainless steel	10,0	7,8	10,0	20	50	0,080	50
11010801011	Stainless steel	14,0	11,0	14,0	28	70	0,120	50
11010801014	Stainless steel	17,0	14,0	17,0	30	75	0,150	50
11010801016	Stainless steel	19,0	16,0	19,0	35	92	0,185	50
11010801018	Stainless steel	21,0	18,0	21,0	40	100	0,200	50
11010801023	Stainless steel	27,0	23,0	27,0	48	120	0,280	50
11010801031	Stainless steel	36,0	31,0	36,0	60	150	0,500	25
11010801040	Stainless steel	45,0	40,0	45,0	82	205	0,620	25
11010801051	Stainless steel	56,0	51,0	56,0	100	250	0,780	25
11011801008	Stainless steel	10,0	7,8	10,0	20	50	0,080	10
11011801011	Stainless steel	14,0	11,0	14,0	28	70	0,120	10
11011801014	Stainless steel	17,0	14,0	17,0	30	75	0,150	10
11011801016	Stainless steel	19,0	16,0	19,0	35	90	0,185	10
11011801018	Stainless steel	21,0	18,0	21,0	40	100	0,200	10
11011801023	Stainless steel	27,0	23,0	27,0	48	120	0,280	10
11011801031	Stainless steel	36,0	31,0	36,0	60	150	0,500	10
11011801040	Stainless steel	45,0	40,0	45,0	82	205	0,620	10
11011801051	Stainless steel	56,0	51,0	56,0	100	250	0,780	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.