

SPR

Protective metal conduits

Protective metal conduit, strip-wound, s profile


Temperature:	-50°C ... +250°C
--------------	------------------

Material:	galvanized steel
-----------	------------------

IP class [acc. to EN 60529]:	IP 40
------------------------------	-------

CHARACTERISTICS:

- Properties: highly flexible
- stretch resistant
- lateral compression resistant

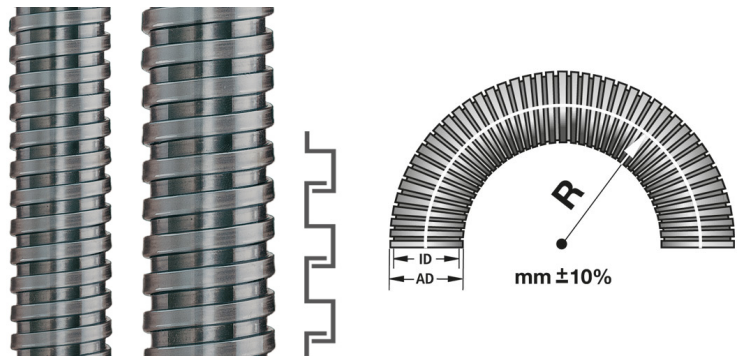

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations / ex-area acc. to EN 1127-1



FLEXA No.	Colour	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
11010101003	Zinc	3,0	4,9	10	25	0,037	50
11010101004	Zinc	4,0	6,0	12	30	0,038	50
11010101005	Zinc	4,8	7,0	19	45	0,046	50
11010101006	Zinc	6,0	8,0	20	50	0,048	50
11010101007	Zinc	7,0	9,3	25	65	0,052	50
11010101009	Zinc	9,0	11,0	30	75	0,068	50
11010101010	Zinc	10,0	13,0	32	80	0,090	50

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.