

USZ-EX-M | metric thread**Connectors**

Metal connector, safety-type, straight, metric outer thread, strain relief, incl. ferrule [brass], sealing [TPE] and O-ring [NBR], for application in EX-Area

Temperature: -40°C ... +100°C

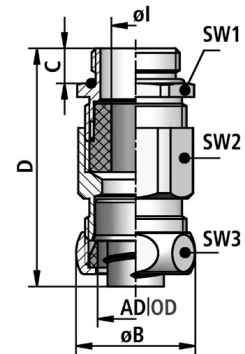
Material: nickel-plated brass

IP class [acc. to EN 60529]: IP 40

for protective conduit: SPR-AS / SPR-VA

CHARACTERISTICS:

- Properties: highly watertight and dustproof 7 friction-type locking of conduit and screw connector correct
- grounding
- covering of the conduit ends
- vibration- and tensionproof
- increased safety "e" acc. to EN 60079-0:2014, EN 60079-7:2016, EN 61241-0:2006 and EN 61241-1:2004

**APPLICATIONS:**

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations / ex-area acc. to EN 1127-1



FLEXA No.	OD [mm]	Thread type	Clamp.range [mm]	Conduit ID	Conduit OD	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS1 [mm]	WS2 [mm]	WS3 [mm]	Weight [kg/100]	PU [pcs.]
15023327120	17,0	M20 x 1,5	9,5-11,0	14,0	17,0	12,5	27,0	10,0	48,0	24	24	25	6,600	10
15023327020	21,0	M20 x 1,5	12,0-15,0	18,0	21,0	16,0	31,0	10,0	49,0	24	29	29	9,700	10
15023327125	21,0	M25 x 1,5	13,0-16,0	18,0	21,0	16,0	31,0	11,0	54,0	30	30	29	9,900	10
15023339132	27,0	M32 x 1,5	19,0-21,0	24,0	27,0	21,0	39,0	13,0	65,0	36	36	36	16,600	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.